


AT&T FiberLine

Fiber Optic LC Connectors

Description

Fiber Optic Connectors Type LC	
Durability	0.2dB max. change after 1000 mating cycles
Temperature range	-20 to +60C
Typical Insertion loss	<0.3dB
Ferrule type	Ceramic

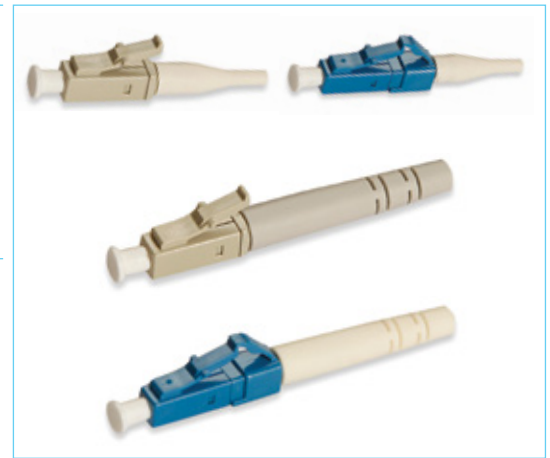

Standard & EU Directives Conformance

- Relevant sections of ANSI/TIA/EIA-604 (FOCIS)
- Relevant sections of IEC 60874
- Relevant sections of IEC 61753
- Relevant sections of IEC 61754
- EU Directive 2011/65/EU (RoHS-2)

Notes:

- Each product has a full-length P/N that can be used as ordering information.
- Each connector has a single letter code that can be used to build fiber-optic cords and pigtails part-numbers.
- The default colors are indicated in this page. Other options available.
- Each bag contains one connector and three colored boots: 0.9mm, 2.0mm & 3.0mm.

Ordering Information - Connectors

Type	Compatible Fiber	Formation	Body Color	Boot Color	Code	Packaging	P/N
LC/UPC Connector	Multimode	Single	Beige	White	P	1/Bag 120/Box	29CM1NV001P-BG61
LC/UPC Connector	Singlemode	Single	Blue	White	Q	1/Bag 120/Box	29CS1NV001Q-BL61
LC/APC Connector	Singlemode	Single	Green	White	R	1/Bag 120/Box	29CS1NV001R-GN61
LC/UPC Connector	Multimode	Double	Beige	White	P	1/Bag 120/Box	29CM1NV002P-BG61
LC/UPC Connector	Singlemode	Double	Blue	White	Q	1/Bag 120/Box	29CS1NV002Q-BL61
LC/APC Connector	Singlemode	Double	Green	White	R	1/Bag 120/Box	29CS1NV002R-GN61

Ordering Information - Clips

Type	Color	Packaging	P/N
Duplex Clip for LC/UPC Multimode Connector	Beige	120/Bag	531M1NV002H-BG6Y
Duplex Clip for LC/UPC Singlemode Connector	Blue	120/Bag	531S1NV001Q-BL6Y
Duplex Clip for LC/APC Singlemode Connector	Green	120/Bag	531S1NV001R-GN6Y